

# CCC4 – Datasheet

High precision, auto-addressable constant current RGBW LED dimmer supporting PLINK or DMX/RDM.



ENTTEC's CCC4 is a 4-channel, auto addressable constant current (CC) LED dimmer designed to dim compatible constant current fixtures up to 1A per channel at 12-24V by default.

Its ability to constantly provide regulated current output based on the voltage provided reduces burnout/thermal runaway and creates a light with more consistent brightness especially for high power lights.

Featuring the integration with ENTTEC's PIXELATOR series controller through the long range, auto-addressing PLINK protocol. This time-saving solution allows users to simply chain devices together using Cat6 cable, extending up to 300m, eliminating the need for manual addressing of each CCC4.

Integrating with DMX controllers, users can utilise RDM to set the start address of each CCC4 (default channel 001). For enhanced configuration flexibility, the CCC4 can convert DMX to the PLINK protocol streamlining the addressing for consecutive CCC4 units in the daisy chain.





CCC4 features a user-serviceable blade fuse and two DIP switches for mode selection between RGB/RGBW and 8-bit/16-bit.<sup>1</sup>

## Features

- Support constant current output with dimming capacity of up to 1A per channel.
- 12-24V DC power input by default, OEM available.<sup>2</sup>
- 1KHz PWM signal refresh rate ensures flicker-free performance.
- Enables daisy-chaining using ENTTEC's auto-addressing PLINK protocol supporting data reliability over long distance.
- Support daisy chaining using DMX/RDM up to 300m.
- RDM identification and addressing functionality.
- On board conversion from DMX to PLINK.
- Status LED and DIP switch toggle between RGB/RGBW and 8-bit/16-bit operating modes.
- User-serviceable blade fuse to protect against short circuits.
- Passive cooling with internal overheating protection.
- Compact design with surface mount and TS-35 Din Rail mount.

<sup>1</sup> CCC4 16-bit mode matches DALI and CVC4 dimming curve.

<sup>2</sup> Consult ENTTEC team for OEM requests within voltage ranges of 5V-48V and up to 1A per channel.

<b>Connectors</b>	1* Power Input (Screw Terminal)		
	1* DMX Input (Screw Terminal)		
	1* PLINK In (RJ45)		
	1* PLINK Out (RJ45)		
	4* CC Output (Screw Terminal)		
<b>IP Rating</b>	IP20		
<b>Data Input Protocols</b>	DMX512a PLINK		
<b>Data Output Protocol</b>	PLINK		
<b>RDM Functionality</b>	Start address configuration		
	Temperature monitoring		
	Firmware updatable		
<b>Start address configuration options</b>	PLINK using PIXELATOR Series Controller		
	DMX/RDM (Default channel: 1)		
<b>Dimming Resolution</b>	8/16-Bit		
<b>Fixture Modes / Channel Footprint/LED Indicator</b>	8-Bit RGB	3ch	
	8-Bit RGBW	4ch	
	16-Bit RGB	6ch	
	16-Bit RGBW	8ch	
<b>Data Input Capability (per chain)</b>	DMX	Up to 1 Universe	
	PLINK	Up to 8 Universes	
<b>Max. CCC4 Chain Length</b>	DMX	300m per chain	
	PLINK	300m between each CCC4	
<b>Input Voltage</b>	12-24V DC (default)		
<b>Max. Current Rating</b>	Max. 4.5A (in 4ch mode)		
<b>Max. Output Power</b>	48 W (@12V)		
	96 W (@24V)		
<b>Device Max. Power Draw</b>	1.5W		
<b>Max. Current per Channel</b>	1A		
<b>Reverse Polarity Protection</b>	Yes (from power port only)		
<b>Over Temperature Protection</b>	Yes (Output intensity will dim to black over 3 seconds, dim back to the received value once temperature has dropped)		
<b>Pulse Width Modulation (PWM) Frequency</b>	1KHz - Fixed		
<b>User Serviceable Fuse:</b>	ATO 5A blade fuse		
<b>Cooling Method</b>	Convection		
<b>Operating Temperature</b>	0°C to +50°C -4°F to 122°F		
<b>Environmental Operating Humidity</b>	5- 95% (non-condensing)		
<b>Mounting Options</b>	Surface & TS35 DIN Rail mount		
<b>Body Material</b>	ABS plastic		
<b>Unit dimensions</b>	88*117.5*31.5mm		
<b>Unit Weight</b>	0.13kg / 0.28lbs		
<b>Shipping dimensions</b>	140*140*40 mm		
<b>Shipping weight</b>	0.19kg / 0.42lbs		
<b>Warranty</b>	3 year return to base manufacturer warranty		


## Certification



## Box Contents

- CCC4
- TS35 DIN clip
- 2 \* Din clip mounting screws

## Application diagram

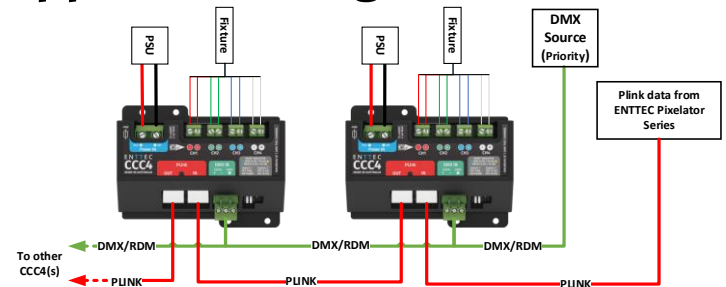

## User Serviceable Fuse

The CCC4 contains a user serviceable 5A blade fuse to protect against overdraw and short circuiting.

## Installation

This product should be installed in accordance with relevant national and local electrical and construction codes by a competent individual who is familiar with the product's operation and associated hazards. Failure to adhere to the product's installation guide may lead to severe injury or property damage. Please refer to the complete installation guide for this product before undertaking any handling, planning, or specification tasks for your project. If you have any doubts, please consult with the local ENTTEC team for guidance.

## Ordering Information

For further support and to browse ENTTEC's range of products visit the [ENTTEC website](https://www.enttec.com).

Item	SKU
CCC4	73927

# enttec.com

MELBOURNE AUS / LONDON UK / RALEIGH-DURHAM USA / DUBAI UAE  
Due to constant innovation, information within this document is subject to change.