ENTTEC

Datasheet
9VLW
For latest version visit:
www.enttec.com

High Quality RGBW 4000K LED Tape

Specifications

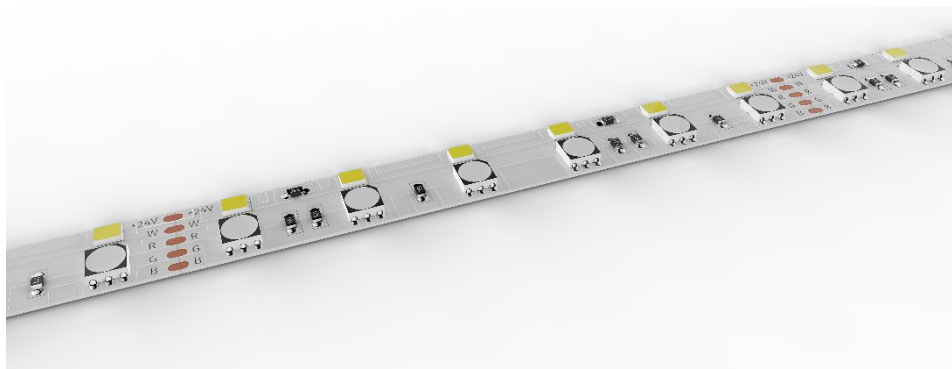## Features

- Video grade RGB LEDs for maximum colour vibrancy and longevity
- 90+ CRI 4000K LEDs
- White LEDs 3 SDCM
- 12mm pitch
- Customized Length available
- 60pcs of RGB and White LEDs per meter
- High light output
- LEDs Dimmable by ENTTEC CV Driver or DIN-LED4PX
- Can be joined together
- Can be cut to a smaller length
- Minimum cut length 100mm
- Input and output connections (loose cable)
- Constant Voltage control
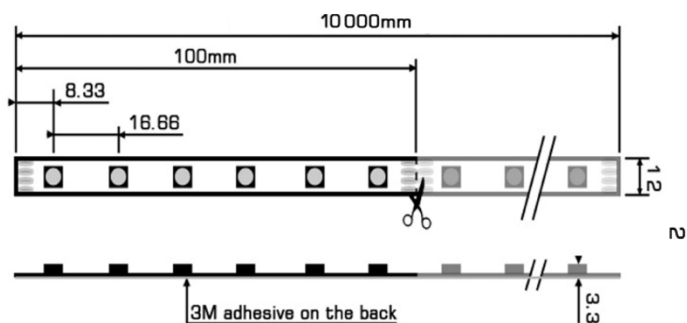- IP20 Indoor use only

Safety

- Do not expose the units to rain
- Do not allow liquid to build up around the tape.
- Do not exceed the rated 24V DC power supply.
- This unit is intended for indoor use only, use of this product outdoors voids all warranties.

Item	Value
Input Voltage	24V DC
Power consumption (W/m)*	
Red	4.45
Green	3.31
Blue	3.12
White	6.4
Luminance (lm/m)	
Red	66
Green	179
Blue	42.6
White	562
CCT (all leds RGB on)	7000K
CCT White	4000K 3SDCM
Beam Angle	120Deg
Net Weight (g/m)	36
Connection (In/Out)	Solder tabs
IP Rating	IP20
PCB Color	White

*Please Note: Operating the strip without a proper heat-sink can permanently damage the electronics and void the warranty. Various of heatsink extrusions can be purchased from ENTTEC website.

ENTTEC

Datasheet
9VLW
For latest version visit:
www.enttec.com

Physical Dimension

Due to continuous improvements and innovations of all ENTTEC products, specifications and features are subject to change without notice.

Ordering Information

The ENTTEC LED strips and compatible products can be ordered from our website or through your ENTTEC dealer.

Item	Value
9VLW-10	HIGH QUALITY RGBW LED TAPE 4000K
73520	ALEPH 1 CV DRIVER (24V)
79324	24V 60W Constant Voltage LED PSU
71003	DIN-LED4PX

enttec.com

MELBOURNE AUS / **LONDON** UK / **RALEIGH-DURHAM** USA